
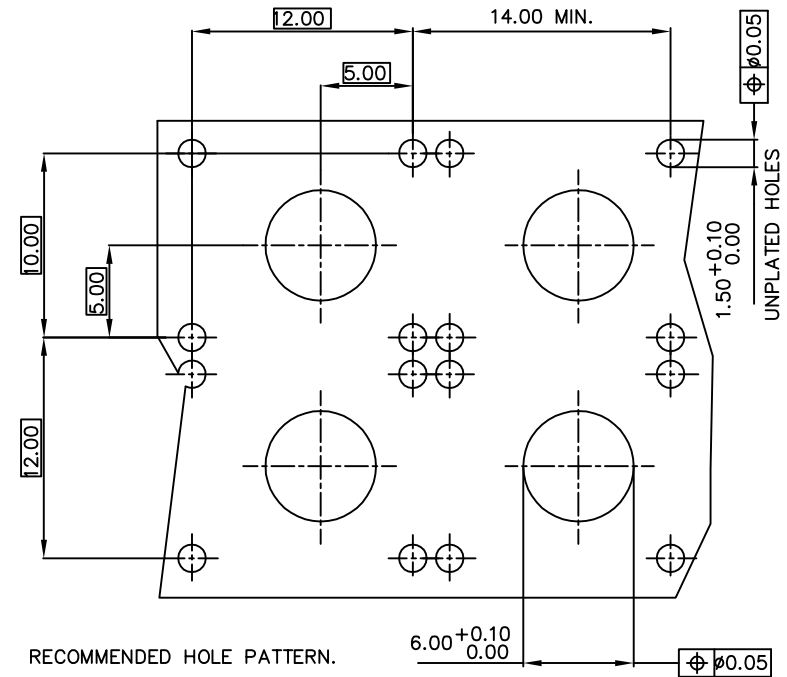
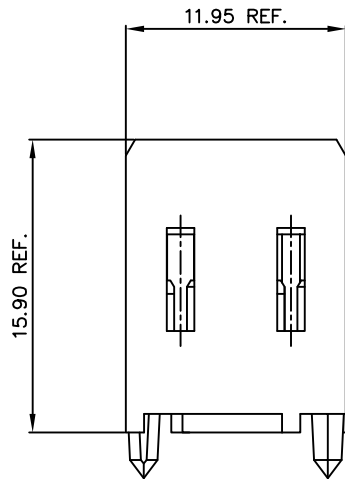
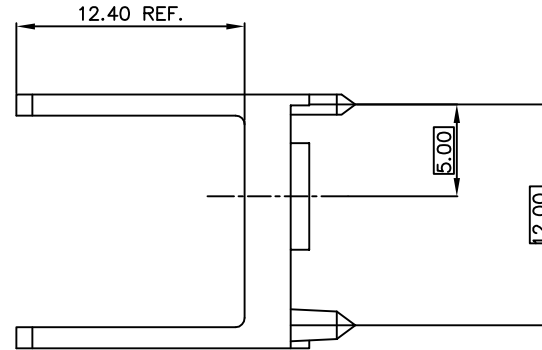


PRODUCT NO. 70290-X01LF

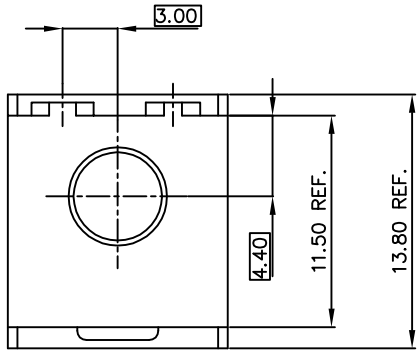

NOTE:

- MATERIAL:
70290-001LF, THERMOPL. POLYESTER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
COLOR GREY.
70290-101LF, LIQUID CRYSTAL POLYMER 30% GLASS,
FLAME RETARDANT ACC. UL 94-V0
COLOR NATURAL.

- THIS PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN
UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS
DESCRIBED IN GS -22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MINIMUM THICK
CIRCUIT BOARD.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
SEE NOTE				COPY		www.fciconnect.com	
ltr	ecn no	dr	date	linear	projection	title	
A	H00366	DAN	910122			S.T. Male Coax	
B	H10490	HBO	911203			12 mm Connectors	
C	H50173	RVI	950320	angles		product family	code
D	H90480	HME	990816	dr	D Andrews	900720	213
E	0005-0357	CLW	050927	eng	E Fejen	950320	sheet
				chr	A V Zanten	900720	1 of 1
				app	H Coojmans	950320	
sheet	revision			scale			
1	E			5:1			
index	sheet			A2	70290		
	1						

PDM: Rev: E STATUS: Released

Printed: May 19, 2011

All rights strictly reserved. Reproduction or reuse in any form without written authority from FCI is prohibited. FCI is not responsible for any damage or liability arising from the use of this document.