


RECOMMENDED HOLE PATTERN,

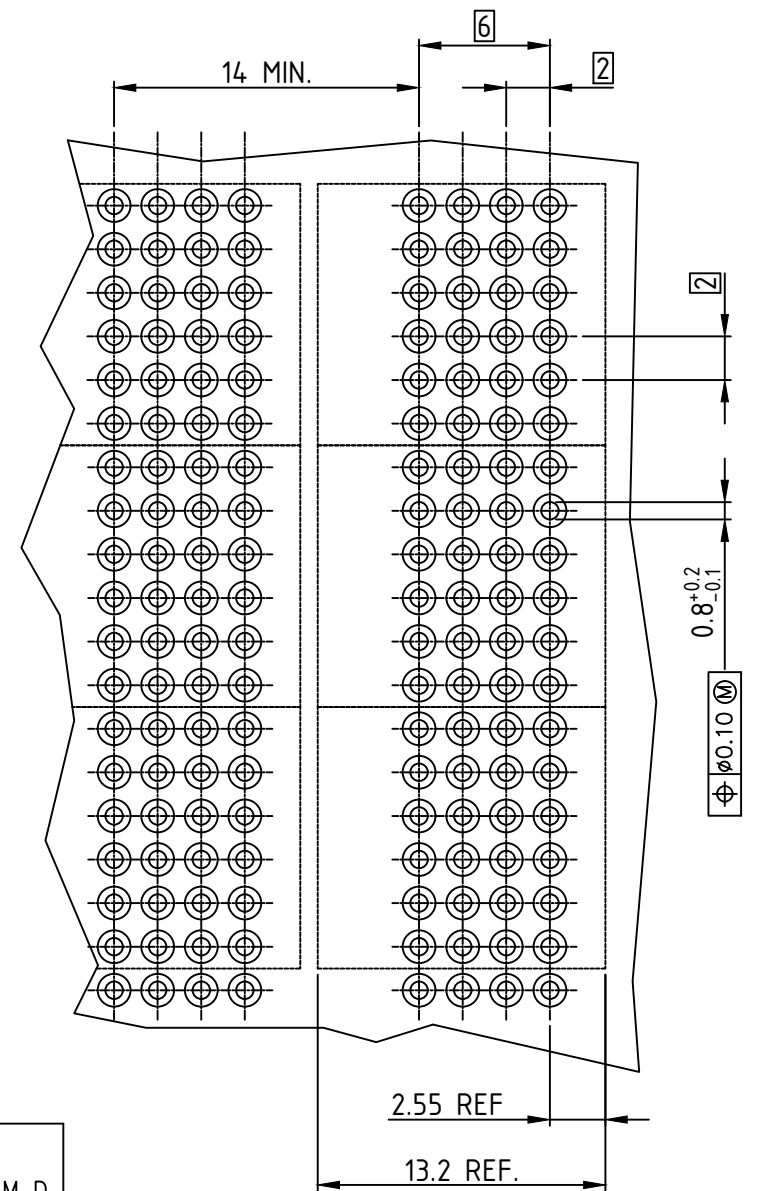


COMPONENT SIDE.

NOTES:

- MATERIAL : BODY : LCP UL94-V0  
: CONTACT : COPPER ALLOY.
- FOR PLATING PERFORMANCE REFER DRAWING # 10159408 <sup>G</sup>
- LOAD IN THIS DIRECTION ( E.G. THROUGH CODING) 30 NEWTON MAXIMUM PER CONNECTOR.
- LOAD IN THIS DIRECTION 15 NEWTON MAXIMUM PER CONNECTOR.
- TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD THE USE OF A FIXTURE IS RECOMMENDED.
- PRODUCT MARKING: ERICSSON PARTNUMBER & BATCH I.D.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47- 0004
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- A <sup>G</sup>SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

DASH NR	CONFIGURATION						PCB THICKN.	DIM A	DIM B	DIM C	DIM D
	ROW #	6	5	4	3	2					
85698-XY YLF	D	+	+	+	+	+	2.4	14.14	3.50	0.54	17.64
	C	+	+	+	+	+					
	B	+	+	+	+	+					
	A	+	+	+	+	+					
" + " POSITION LOADED											

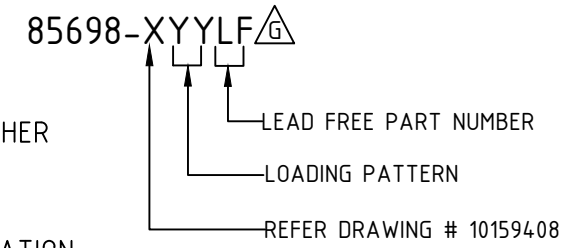

mat'l. code				surface <input checked="" type="checkbox"/> ISO 1302		tolerance <input checked="" type="checkbox"/> ISO 406		projection <input checked="" type="checkbox"/> ISO 1101		product family	
ltr				tolerances unless otherwise specified		mm		scale		METRAL	
E	DG08-0171	TER	2008-09-10	angles	.X±0.3	mm		title		STB SIGN RCP	
F	DG10-0294	CENH	2010-07-20	linear	.XX±0.13	mm		STB + WAFER 12 mm		sheet 1 of 1	
G	ELX-I-38655	MINI	2020-10-16	0°±2°	.XXX±0.050	mm		dwg no		85698	
dr				P. HENDRIKSE		1998-04-03		sheet		A3	
engr				ARUN		2020-10-16		type		Product Customer Drawing	
chr				ALEX BABU		2020-10-16		type		Product Customer Drawing	
appd				SANJO		2020-10-16		type		Product Customer Drawing	
sheet index		revision		G							
		sheet		1							