
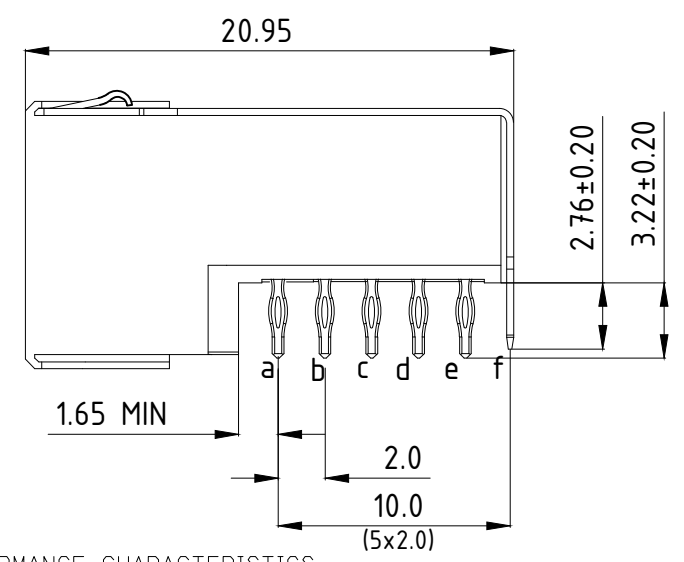


LAY-OUT P.C.B.- HOLE

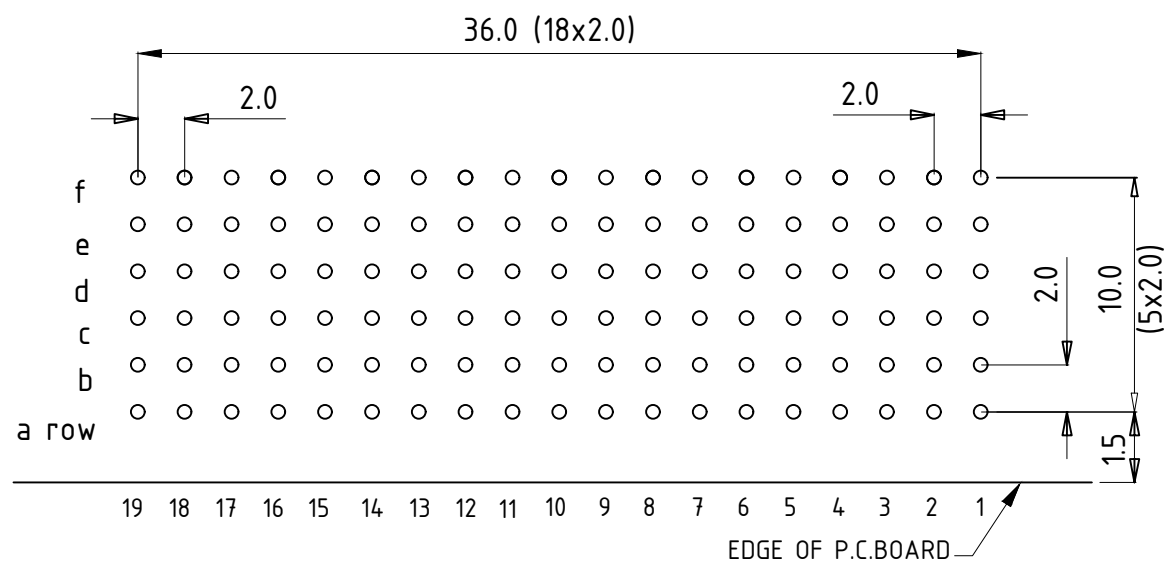

PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
- CURRENT RATING: 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE: 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE : 20 m Ω MAX
- INSERTION FORCE: 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN /CONT
- INSULATION RESISTANCE: 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR :LF=LEAD FREE
PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC :201844.003)
- THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004

Part No-HM2R71PA5108----

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302		ISO 406 ISO 1101				MILLIPACS	
ltr		ecn no		date		tolerances unless otherwise specified		title	
A		-		KN 2001-09-14		.0±0.2		MPACS 5+2R RA RCP CONN TYPE B	
B		DG05-0278		KASON 2005-08-02		linear		MM	
C		DG07-0362		KASON 2007-09-07		0°±1°		scale -	
D		DG10-0110		NZ 2010-10-13		dr M Fret		1997-10-15	
E		ELX-I-37074		MINI 2020-05-18		enr BINESH		2020-05-18	
						chr ALEX		2020-05-18	
						appd SAN0J		2020-05-18	
sheet index		revision sheet		E 1					
								dwg no sheet 1 of 1 size BS, C ,201444,038 A3 type Product Customer Drawing	