

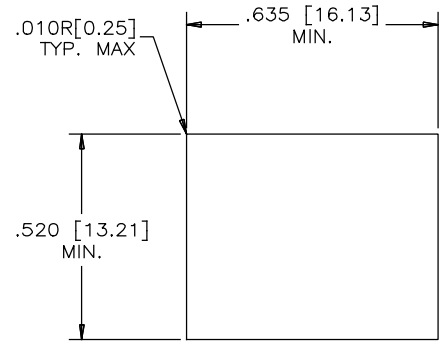

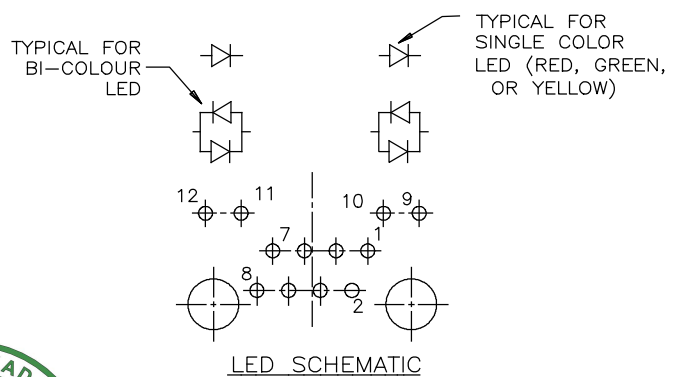
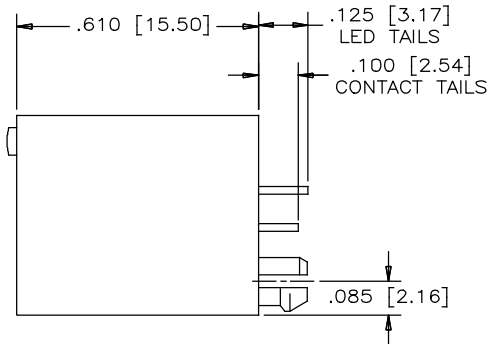


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
C	PROPOSAL	JUL04/06	L.CHAN
D	REVISE FOR DIRECTION OF BOARD LOCK	FEB13/17	L.CHAN

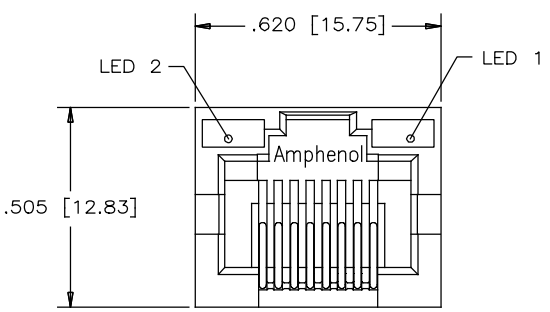

RECOMMENDED PANEL CUTOUT

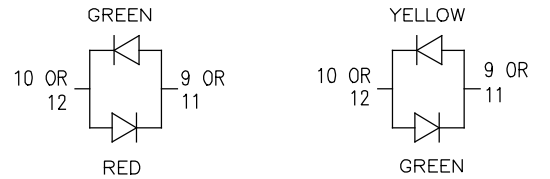

BI-COLOUR LED DETAIL
(RED/YELLOW AND GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

MATERIALS:


PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0

CONTACTS: PHOSPHOR BRONZE
(FLAT) PLATING: 50 μ" [1.27 MICRONS]
MIN. GOLD ON MATING SURFACES.
50 μ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ" [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING TEMPERATURE AT 260°C MAXIMUM
FOR 5 SEC MAXIMUM.

AMPHENOL PART NUMBER: RJHSE-N08X

REFER TO LED OPTIONS DRAWING
FOR ORDERING CODES

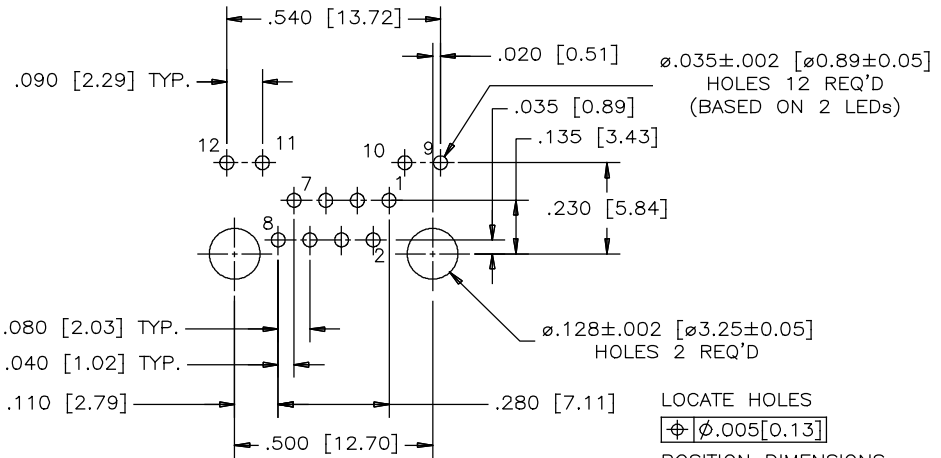

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

UNLESS SPECIFIED OTHERWISE	DRAWN PAULW	DATE JUL04/06	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS INCH	CHECKED CHIGOW	DATE JUL04/06	
SECONDARY MILLIMETER	M.E. APP'D		TITLE SINGLE-PORT HIGH SPEED MODULAR JACK, VERTICAL MOUNT, BLACK HOUSING, 8 POSITIONS, 8 FLAT CONTACTS, WITH LED OPTIONS UNSHIELDED, WITHOUT FLANGE - RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		DWG. NO. P-RJHSE-N08X
GENERAL TOLERANCES	DWG APPR.		REV D
1 DECIMAL PLACE ±0.30	ENG. REL. NO.		CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
2 DECIMAL PLACES ±0.25	REF.		
3 DECIMAL PLACES ±0.20	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	
ANGULAR DEGREES ±1.0°			