
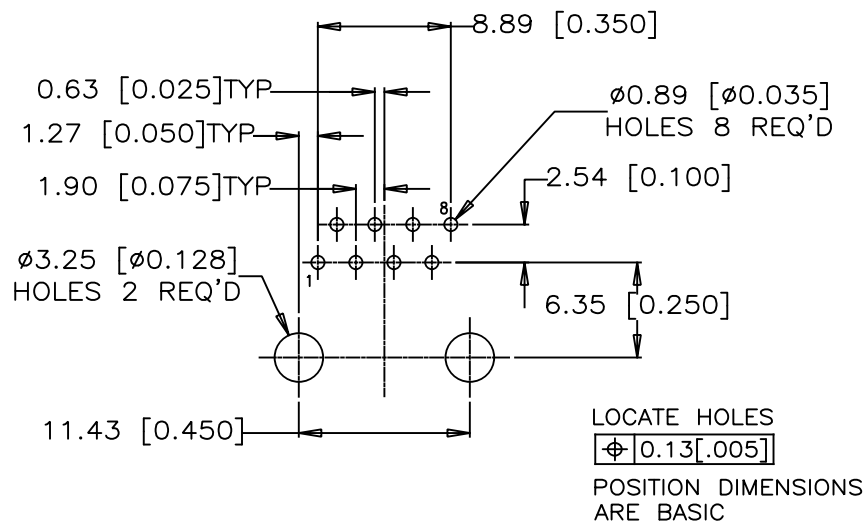


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
C	CHNGE 11.81 TO 11.43 PER ACTUAL PART	OCT29/12	L.CHAN
D	UPDATE DRAWINGS	MAY23/17	L.CHAN
E	UPDATING THE HEIGHT OF CONTACT TAILS	JAN 20/21	KELVIN.T

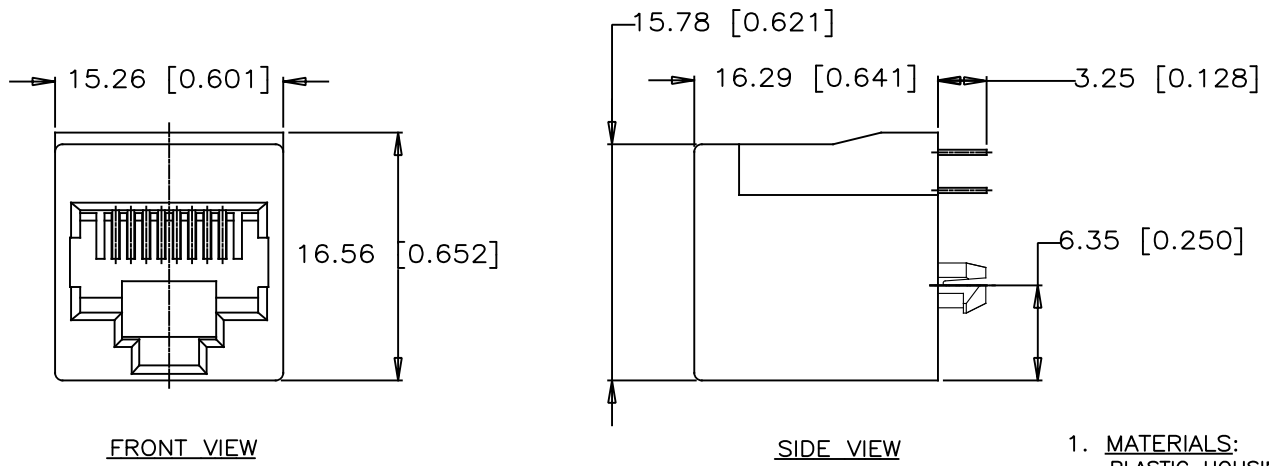

**RECOMMENDED P.C.B. LAYOUT**  
 (COMPONENT SIDE OF BOARD)  
 TOLERANCE: ±0.05 [0.002](TOP VIEW)

- MATERIALS:**  
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0  
 COLOR: BLACK  
  
 CONTACTS: PHOSPHOR BRONZE  
 PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES  
 SEE AMPHENOL PART NUMBER FOR DETAIL.  
 50 μ" [1.27 MICRONS]  
 MIN. NICKEL UNDERPLATE  
 100 μ" [2.54 MICRONS]  
 MIN. MATTE TIN OR GOLD FLASH  
 ON CONTACT TAILS.
- MECHANICAL:**  
 MATING FORCE: 5.0 LBS MAX.
- ELECTRICAL:**  
 CONTACT RESISTANCE: 40 MILLIOHMS MAXIMUM  
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM  
 CURRENT RATING: 1.5 AMPS  
 VOLTAGE RATING: 125 VOLTS AC
- ENVIRONMENTAL:**  
 STORAGE TEMPERATURE: -20°C to 85°C  
 PACKAGING METHOD: TRAY PACKAGING

**PART NUMBER:** RJE08-188-0X10  
**GOLD PLATING:**  
 1 = 6 μ"  
 2 = 15 μ"  
 3 = 30 μ"  
 4 = 50 μ"

UNLESS SPECIFIED OTHERWISE	DRAWN PAULW	DATE DEC 05/05	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS MILLIMETER	CHECKED LAWRENCE.C	DEC 05/05	
SECONDARY INCH	M.E. APP'D		TITLE
REFERENCE IN PARENTHESES	Q.A. APP'D		MODULAR JACK, TOP ENTRY, 8 POSITION, 8 CONTACTS, WITHOUT FLANGE, UNSHIELDED, - RoHS COMPLIANT
GENERAL TOLERANCES	DWG APPR.		DWG. NO.
1 DECIMAL PLACE ±0.30	ENG. REL. NO.		P-RJE08-188-0X10
2 DECIMAL PLACES ±0.25	REF.		REV
3 DECIMAL PLACES ±0.20	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	E
ANGULAR DEGREES ±1.0°			CODE ID NO. 03554   DWG SIZE: c   SCALE: N/A   SHEET 1 OF 1