

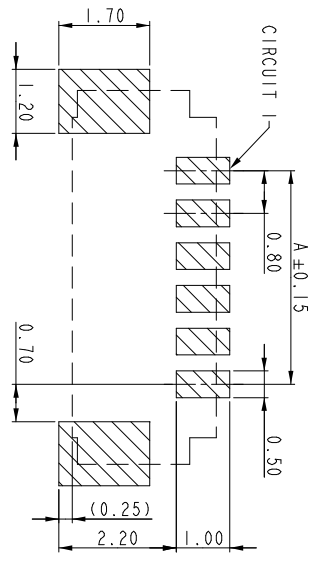


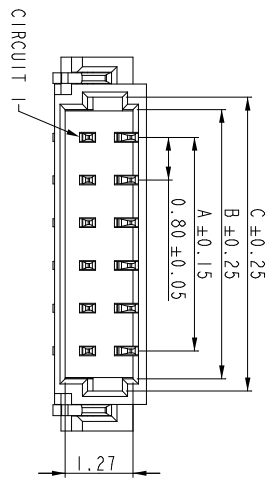


PRODUCT NUMBER
SEE PART NO. TABLE

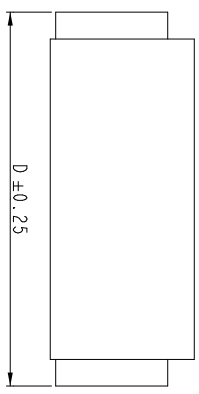

TOLERANCE: ±0.05
RECOMMENDED P.C.B. Layout
TOP VIEW

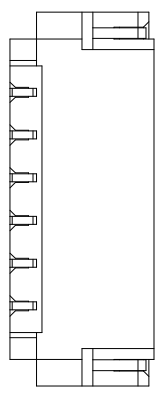

NOTES:

1. MATERIAL: INSULATION(HALOGEN FREE): LCP, UL94V-0,GLOW WIRE COMPATIBLE CONTACT: COPPER ALLOY, t=0.15
 2. MATE WITH RECEPTACLE: AFCI 10145492
 3. THE INSULATION CAN WITHSTAND IR REFLOW 260°C FOR 10 SECONDS
 4. PRODUCT SPEC: GS-12-1444
 5. PACKAGING SPEC: GS-14-2616
 6. ORDERING CODE: 10144041-XX X X X X LF
- NO. OF PINS 02~24 PIN
- INSULATION COLOR
- PACKAGE
- CONTACT FINISH
- CONTACT FINISH
- 1: TIN PLATED OVER NICKEL
- 2: GOLD FLASH OVER NICKEL

PIN	A	B	C	D	PIN	A	B	C	D
02	0.80	1.84	2.30	3.80	11	8.00	9.04	9.50	11.00
03	1.60	2.64	3.10	4.60	12	8.80	9.84	10.30	11.80
04	2.40	3.44	3.90	5.40	14	10.40	11.44	11.90	13.40
05	3.20	4.24	4.70	6.20	15	11.20	12.24	12.70	14.20
06	4.00	5.04	5.50	7.00	16	12.00	13.04	13.50	15.00
07	4.80	5.84	6.30	7.80	17	12.80	13.84	14.30	15.80
08	5.60	6.64	7.10	8.60	20	15.20	16.24	16.70	18.20
09	6.40	7.44	7.90	9.40	22	16.80	17.84	18.30	19.80
10	7.20	8.24	8.70	10.20	24	18.40	19.44	19.90	21.40

mat'l. code	ISO 1302	tolerance	ISO 406	ISO 1101	projection	product family	MINITEK			
tr	ecn no	dr	date	surface	ISO 1302	tolerance	ISO 406	ISO 1101	projection	product family
A	New Release	Tony	2017-05-22	tolerances unless otherwise specified	XX±.25	mm	scale 1:1			
B	Elx-N-33468	Jason	2019-05-14	angles	XX±.15	mm				
				linear	.XXX±.08	mm				
				dr	TONY LENG	2017-05-22				
				engr	Jason Wang	2019-05-09				
				chr	L.Q Lei	2019-05-09				
				qppd	TIM YAO	2019-05-09				

sheet index	revision	sheet	1	4	5	6
title			0.8mm Pitch RA Header SMT			
dwg no			10144041			
sheet 1 of 1			size A3			
type			Product Customer Drawing			